


Daikin Altherma hybrid  
heat pump

The natural  
combination



Daikin Altherma  
hybrid heat pump,  
the natural  
combination

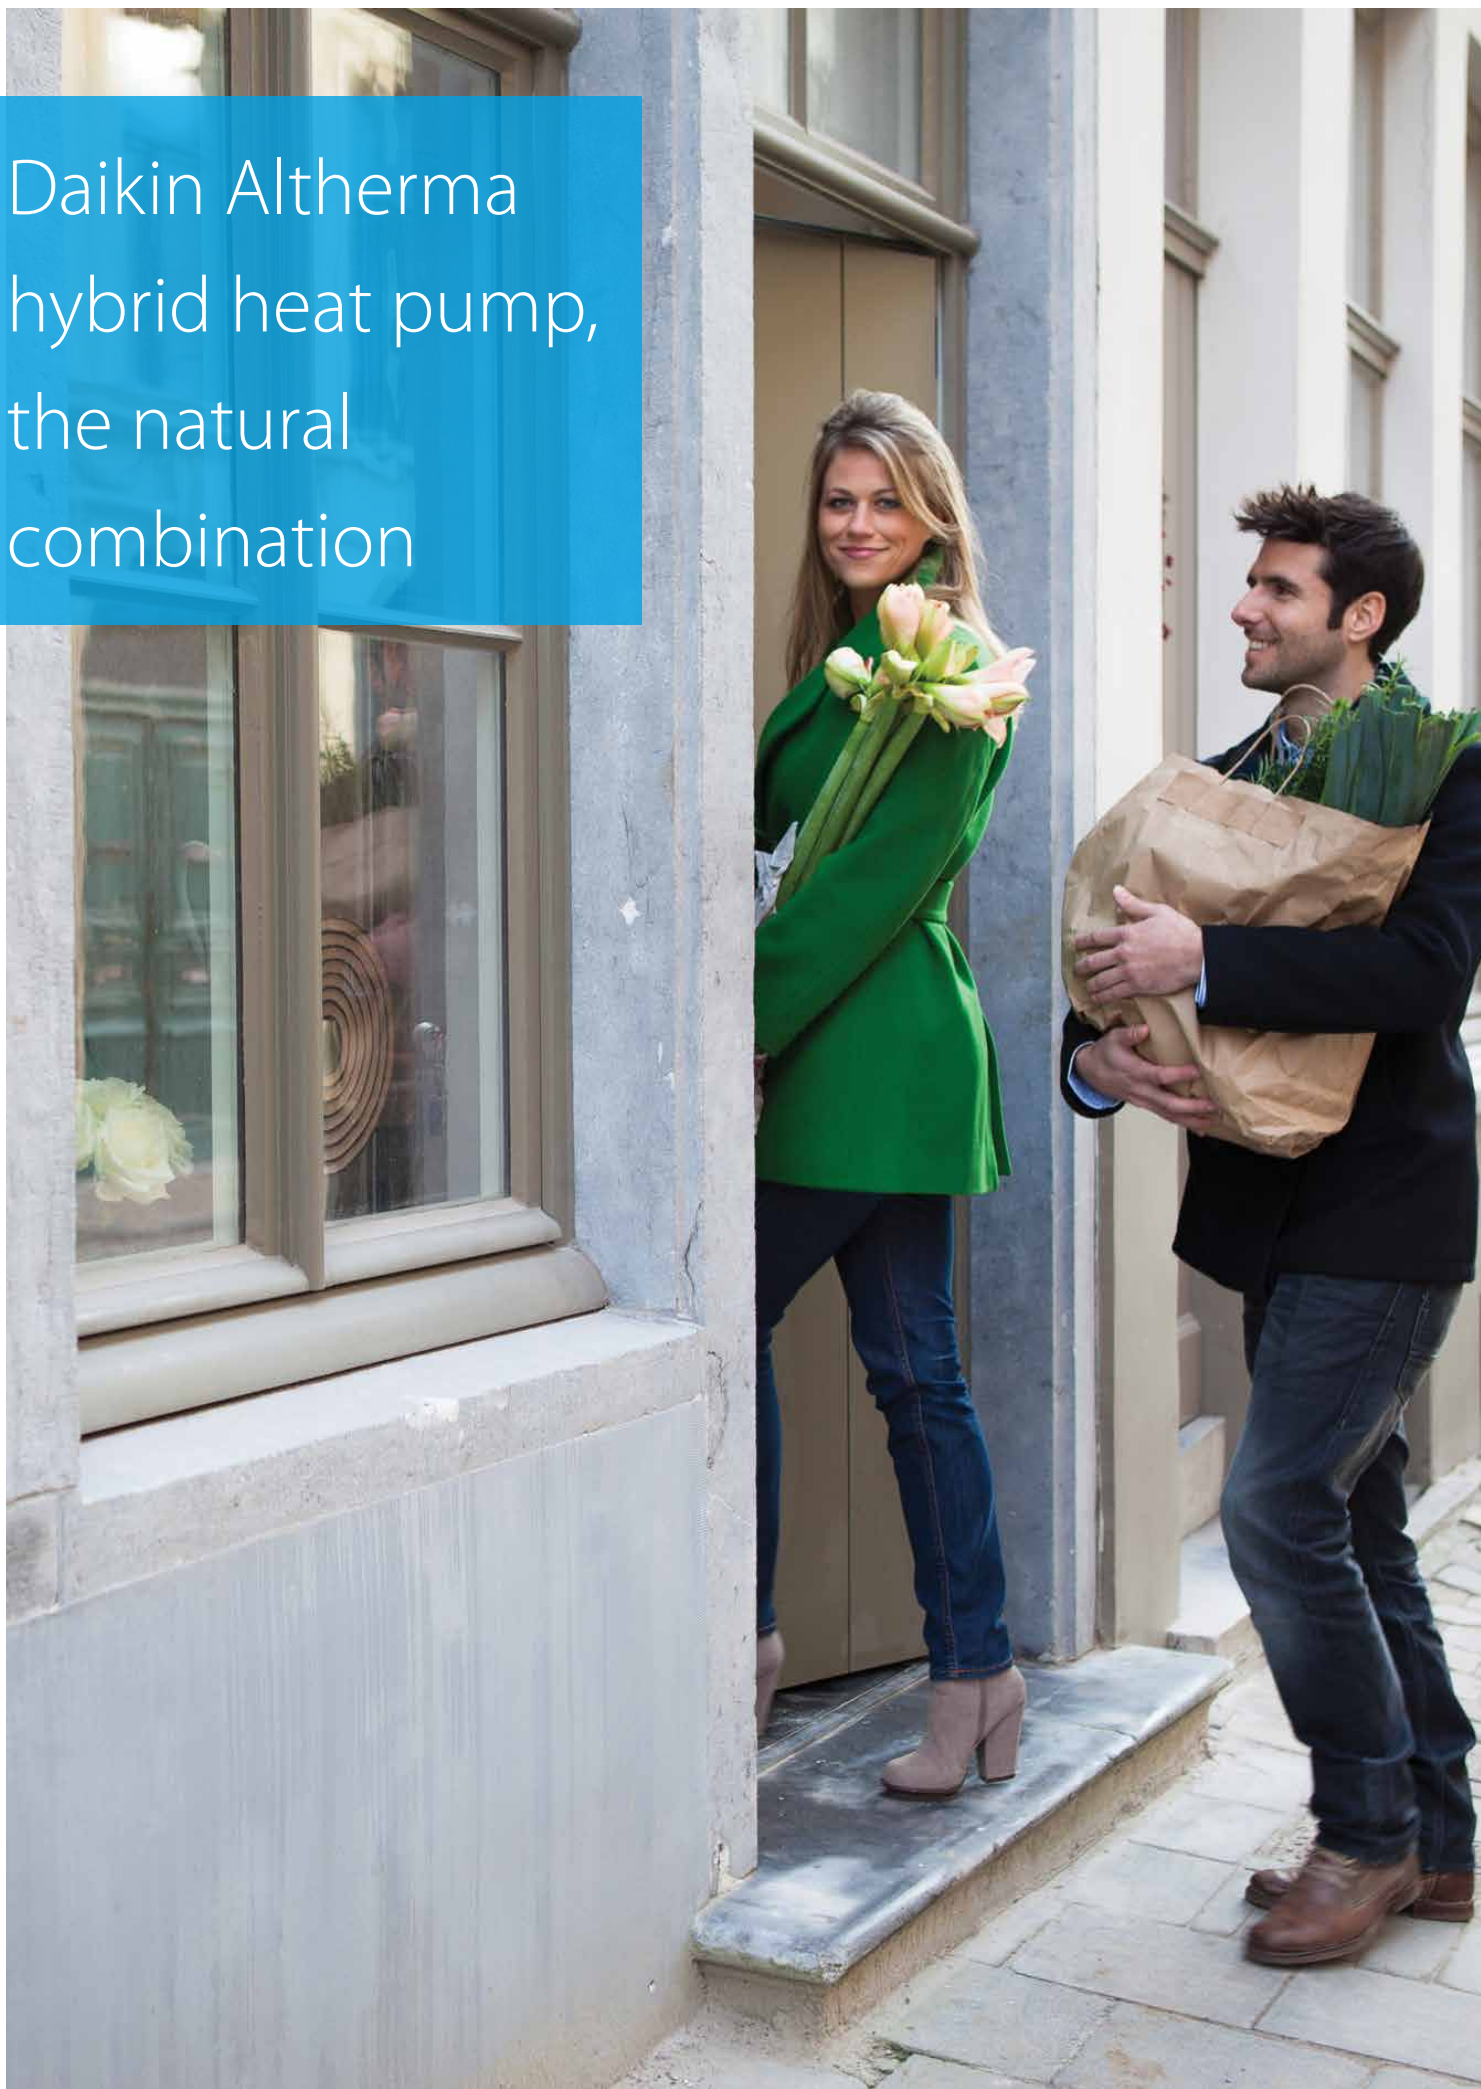

## Why choose Daikin Altherma hybrid heat pump?

What the customer wants:

- › more energy efficient systems
- › more cost effective systems

Your solution: choose a Daikin Altherma hybrid heat pump

- › combination of gas condensing technologies and air-to-water heat pumps
- › delivers up to 35% more heating efficiency
- › optimises the operation of the most efficient gas condensing boilers

Customer benefits:

- › low running costs for heating and domestic hot water
- › low investment costs
- › ideal for renovation applications

Your gains:

- › modular construction
- › Easy and fast installation


## What is condensing boiler technology?


Condensing boiler technology converts the fuel used into usable heat, virtually without loss. This is both good for the environment and your wallet, since lower energy consumption means lower heating costs, less use of energy resources and a reduction in CO<sub>2</sub> emissions. During this process, flue gases are cooled to the extent that the steam they contain is condensed. The energy that is released by this process, is used as heating energy.

## What is an air-to-water heat pump?

The Daikin Altherma air-to-water heat pump is a sustainable energy source: extracting heat from the outside air. In a closed loop containing a refrigerant, a thermodynamic cycle is created through evaporation, condensation, compression and expansion. This 'pumps' heat from a lower to a higher temperature level.

The heat gained is transferred to your home's central heating distribution system.

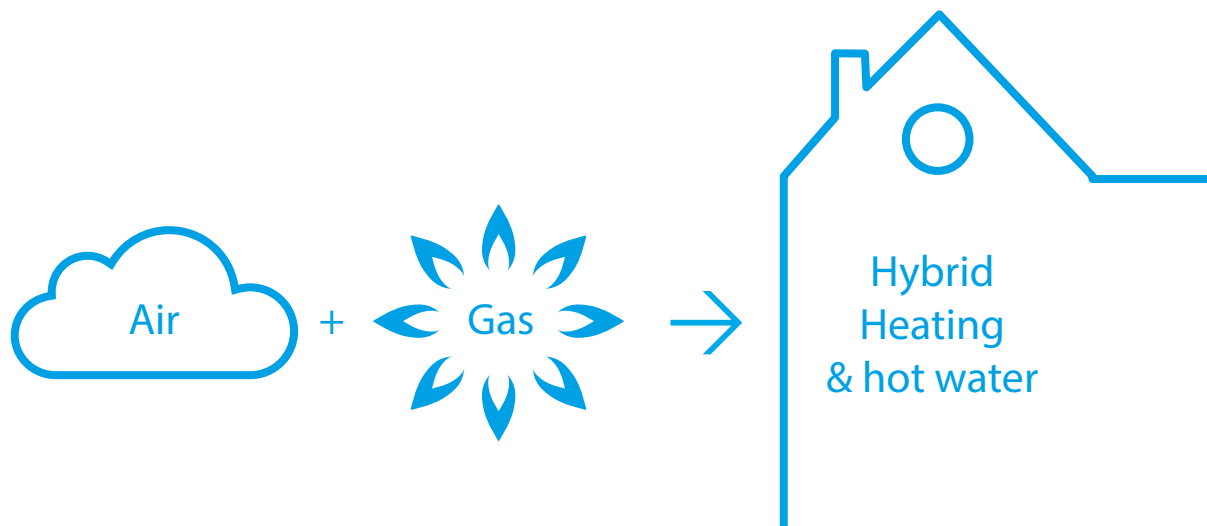

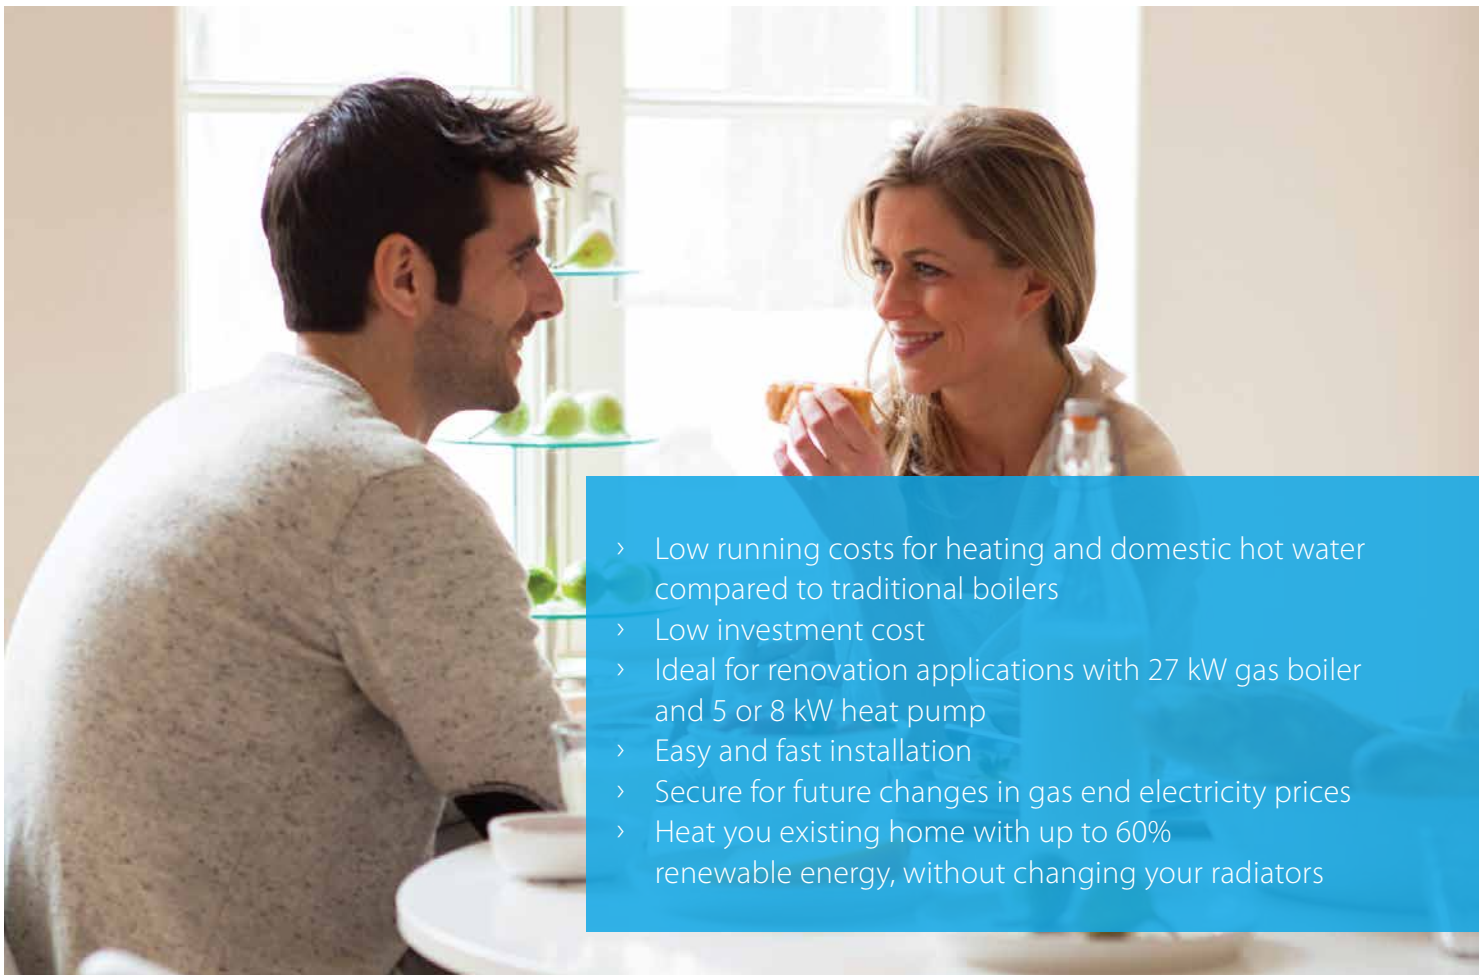

- > Low running costs for heating and domestic hot water compared to traditional boilers
- > Low investment cost
- > Ideal for renovation applications with 27 kW gas boiler and 5 or 8 kW heat pump
- > Easy and fast installation
- > Secure for future changes in gas end electricity prices
- > Heat you existing home with up to 60% renewable energy, without changing your radiators

## Low running costs for heating and domestic hot water compared to traditional boilers

### A. Space heating



**Most economical mode**


- > heat pump only
- > hybrid mode
- > gas only



#### **Energy prices & Efficiency**

Depending on the outdoor temperature, energy prices and the internal heat load, the Daikin Altherma hybrid heat pump smartly chooses between the heat pump and/or the gas boiler, possibly in simultaneous operation, always selecting the most economical mode to operate.

## Illustration of an average European climate

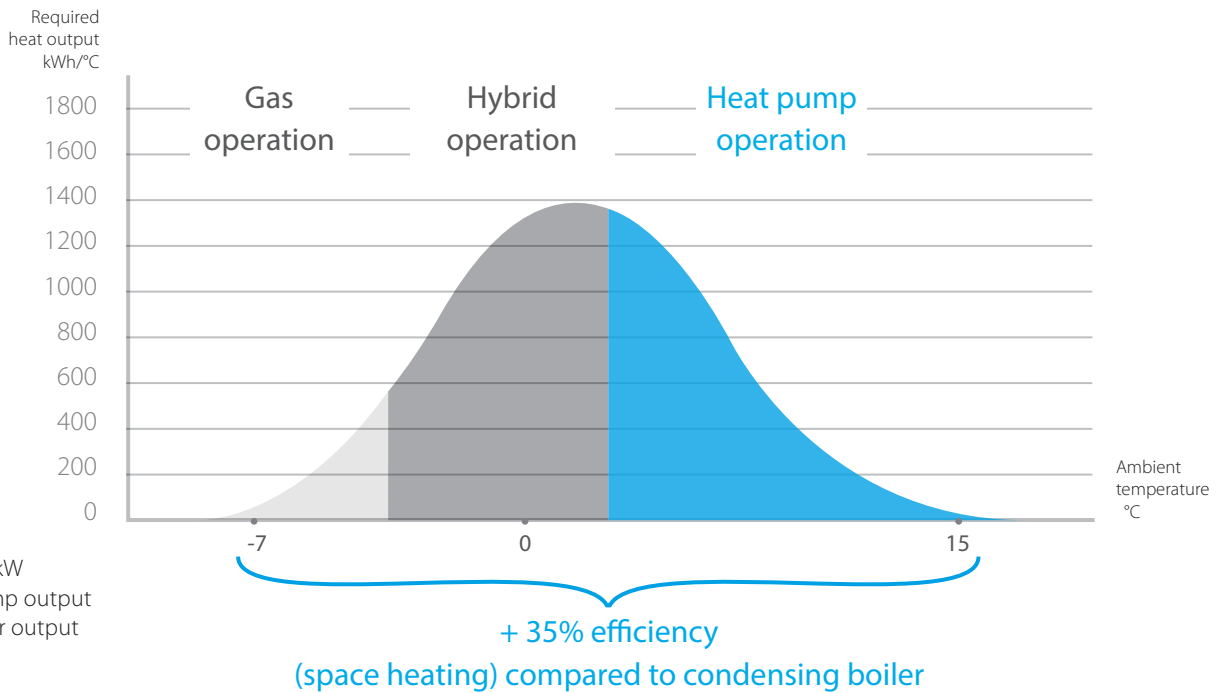

- › Heat load: 14 kW
- › 70% heat pump output
- › 30% gas boiler output

Heat load = the capacity of the space heating system required to maintain comfortable indoor temperatures at any time.

Required heat output = heat load x n° of occurring hours per year

### Heat pump operation

The heat pump integrated in the Daikin Altherma hybrid heat pump is the best available technology for optimizing running costs at moderate outdoor temperatures, resulting in a COP (Coefficient Of Performance) of 5.04!

temperature of the water flowing from the radiators to the heat pump and so maximizing the heat pump efficiency. The exact time the switch-over is made from heat pump operation to hybrid operation depends on the house characteristics, energy prices, the requested indoor temperature setting and the outdoor temperature.

### Hybrid operation

If a high heat load is required, or to achieve the highest efficiencies at the current conditions, both the gas boiler and heat pump operate at the same time in the most economical way. The water flow rate will be automatically regulated, in order to have the possibility of lowering the

### Gas operation

When outdoor temperatures are dropping drastically, it is no longer efficient to operate in hybrid mode. At that point, the unit will switch automatically to gas operation only.

(1) heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

## B. Domestic hot water

### Hot water produced with gas condensing technology


Efficiency increase up to 10-15% compared to traditional gas condensing boilers thanks to a special dual heat exchanger:

- › cold tap water flows directly into the heat exchanger
- › optimal and continuous condensing of the flue gases during domestic hot water preparation



## Low investment benefits

There is no need to replace the existing radiators (up to 80°C) and pipe work as our Daikin Altherma hybrid heat pump connects directly to the existing heating system, thus reducing the cost and disruption of installation. Thanks to the compact dimensions, the space needed for the new system is very similar to that of an existing system, so there is no loss of space and no need for structural modifications.

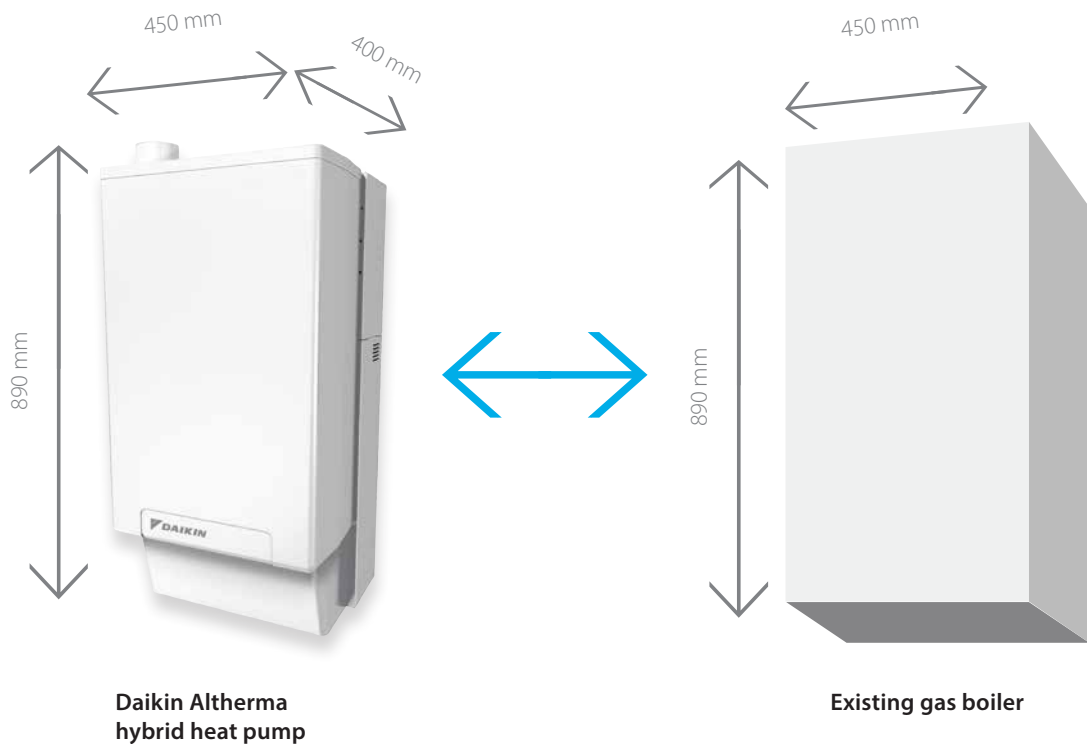

## Ideal for renovation applications

Several applications are possible using the Daikin Altherma hybrid heat pump as all heat loads are covered up to 27 kW. The gas boiler can be installed without the heat pump in the early stages, in order to quickly restart heating in the case of a breakdown of the existing gas boiler.



## Easy and fast installation: 3 components

- › Heat pump outdoor unit
- › Heat pump indoor unit
- › Gas condensing boiler

As the heat pump indoor unit and gas condensing boiler are delivered as separate units, they are easier to handle and manipulate, and easier to install. The heat pump indoor unit is easily mounted on the wall with a standard back plate. With the quick interconnections, the gas condensing boiler is easily attached to the heat pump indoor unit, resulting in a very compact unit. Similar to all wall mounted gas boilers, all the connections are at the bottom and all the components can be accessed from the front, which makes the unit easy to service and maintain.



Heat pump outdoor unit

### Gas condensing boiler



Heat pump indoor unit


Replacing a gas boiler with a Daikin Altherma hybrid heat pump means saving on running costs for both space heating and the domestic hot water supply.



## Case Study

A running cost comparison is made based on below parameters for a typical Belgian winter. Thanks to the hybrid principle, the most cost-efficient operation will be used no matter what the situation is.

### Heat consumption during winter

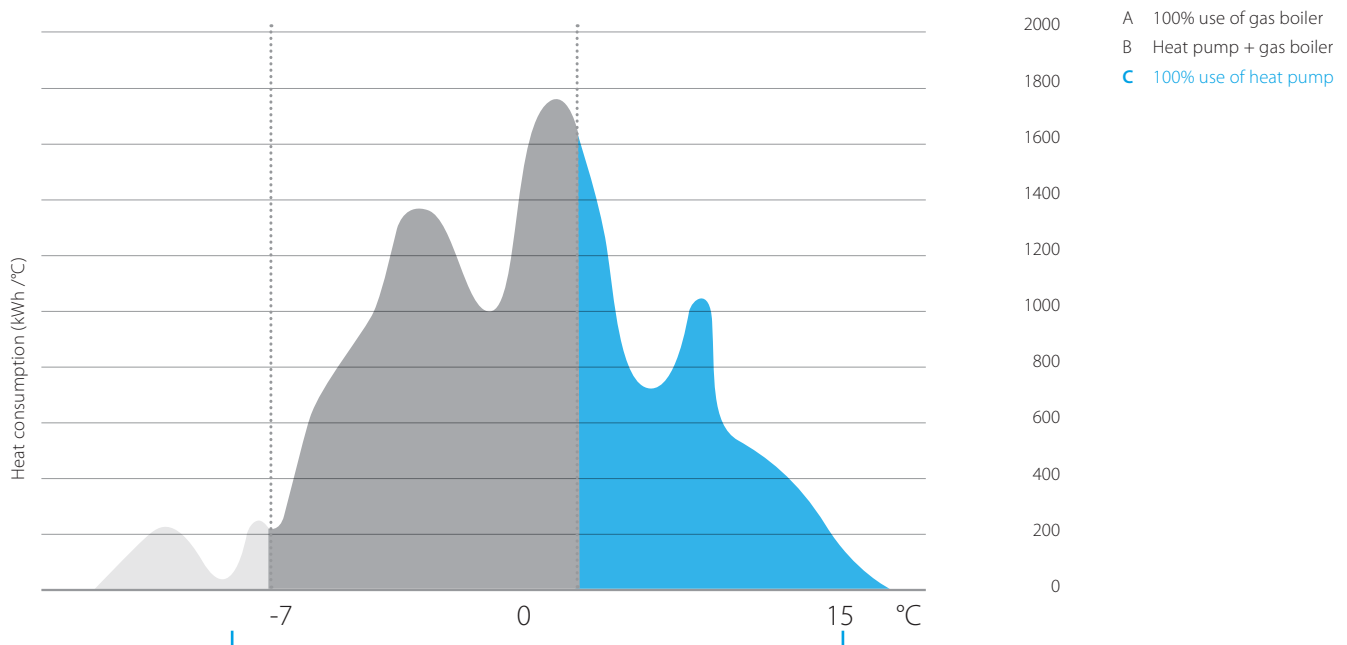

+35% efficiency (space heating) compared to existing condensing gas boiler



	Daikin altherma hybrid heat pump	New gas condensing boiler	Existing gas condensing boiler
		<b>Space heating</b>	
Energy supplied by HP	12,800 kWh		
HP efficiency	3.64 Scop		
Energy supplied by gas boiler	6,700 kWh	19,500 kWh	19,500 kWh
Space heating efficiency	90%	90%	75%
Running costs	1,220 €	1,520 €	1,820 €
		<b>DHW HEATING</b>	
Energy supplied by gas boiler*	3,000 kWh	3,000 kWh	3,000 kWh
DHW heating efficiency*	90%	80%	65 %
Running costs*	230 €	260 €	320 €
		<b>TOTAL</b>	
Running costs	1,450 €	1,780 €	2,140 €

\* for combi-boiler, no separate domestic hot water tank

## → Yearly savings: for space heating and domestic hot water

**-19%** versus new gas condensing boiler **330 €/year**

**-32%** versus existing gas condensing boiler **690 €/year**

### Conditions

Heat load	16 kW
Design temperature	-8°C
Space heating off temperature	16°C
Maximum water temperature	60°C
Minimum water temperature	38°C
Gas price	0.070 €/kWh
Electricity price (day)	0.237 €/kWh
Electricity price (night)	0.152 €/kWh
Total space heating requirement	19,500 kWh
Total DHW heating requirement (4 persons)	3,000 kWh

# Specifications

Efficiency data				EHYHBH + EVLQ	05AV32 + 05CV3	08AV32 + 08CV3
Heating capacity	Min.			kW		
	Nom.			kW		
	Max.			kW		
Power input	Heating	Nom.		kW		
COP						

Indoor Unit				EHYHBH	05AV32	08AV32	EHYKOMB33A2/3
Gas	Consumption (G20)	Min-Max		m <sup>3</sup> /h			0.78-3.39
	Consumption (G25)	Min-Max		m <sup>3</sup> /h			0.90-3.93
	Consumption (G31)	Min-Max		m <sup>3</sup> /h			0.30-1.29
	Connection	Diameter		mm			15
Central heating	Heat input Q <sub>n</sub> (net calorific value)	Nom	Min-Max	kW			7.6-27 (3)
	Output P <sub>n</sub> at 80/60°C	Min-Nom		kW			8.2-26.6 (3)
	Efficiency	Net calorific value		%			98 (4) / 107 (5)
	Operation range	Min-Max		°C			15-80
Domestic hot water	Output	Min-Nom		kW			7.6-32.7
	Water flow	Rate	Nom	l/min			9.0 / 15.0
	Operation range	Min-Max		°C			40-65
Supply air	Connection			mm			100
	Concentric						Yes
Flue gas	Connection			mm			60
Casing	Colour				White		White - RAL9010
	Material				Precoated sheet metal		
Dimensions	Unit	HeightxWidthxD	Depth	mm	902x450x164		820x490x270
Weight	Unit			kg	30	31.2	36
Power supply	Phase/Frequency/Voltage			Hz/V			1~/50/230
Electrical power consumption	Max.			W			55
	Standby			W			2
Operation range	Heating	Ambient	Min.-Max.	°C	-25~25		-
		Water side	Min.-Max.	°C	25~55		-
Notes							For water circuit central heating, safety valve: refer to EHYHB*

Outdoor Unit				EVLQ	05CV3	08CV3
Dimensions	Unit	HeightxWidthxD	Depth	mm	735x832x307	
Weight	Unit			kg	54	56
Compressor	Quantity				1	
	Type				Hermetically sealed swing compressor	
Operation range	Heating	Min.-Max.		°CWB	-25~25	
Refrigerant	Type / GWP				R-410A / 2,087.5	
	Charge			kg/TCO <sub>2</sub> Eq	1.45/3.0	1.60/3.3
Sound power level	Heating	Nom.		dBA	61	62
Sound pressure level	Heating	Nom.		dBA	48	49
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230	
Current	Recommended fuses			A	20	

(1) Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) (3) Values according to G20 (4) 80/60 (5) 40/30 (30%)  
Contains fluorinated greenhouse gases



Indoor unit



Outdoor unit

Efficiency data		EHYHBX + EVLQ		08AV3 + 08CV3		
Heating capacity	Min.		kW	1.80 (1) / 1.80 (2)		
	Nom.		kW	7.40 (1) / 6.89 (2)		
	Max.		kW	10.02 (1) / 9.53 (2)		
Cooling capacity	Min.		kW	2.50 (1) / 2.50 (2)		
	Nom.		kW	6.86 (1) / 5.36 (2)		
	Power input	Heating	Nom.	kW	1.66 (1) / 2.01 (2)	
		Cooling	Nom.	kW	2.01 (1) / 2.34 (2)	
COP				4.45 (1) / 3.42 (2)		
EER				3.42 (1) / 2.29 (2)		

Indoor Unit		EHYHBX		08AV3		EHYKOMB33A2/3	
Gas	Consumption (G20)	Min-Max		m <sup>3</sup> /h		0.78-3.39	
	Consumption (G25)	Min-Max		m <sup>3</sup> /h		0.90-3.93	
	Consumption (G31)	Min-Max		m <sup>3</sup> /h		0.30-1.29	
	Connection	Diameter		mm		15	
Central heating	Heat input Q <sub>n</sub> (net calorific value)	Nom	Min-Max	kW		7.6-27 (3)	
	Output P <sub>n</sub> at 80/60°C	Min-Nom		kW		8.2-26.6 (3)	
	Efficiency	Net calorific value		%		98 (4) / 107 (5)	
	Operation range	Min-Max		°C		15~80	
Domestic hot water	Output	Min-Nom		kW		7.6-32.7	
	Water flow	Rate	Nom	l/min		9.0 / 15.0	
	Operation range	Min/Max		°C		40~65	
Supply air	Connection			mm		100	
	Concentric					Yes	
Flue gas	Connection			mm		60	
Casing	Colour			White		White - RAL9010	
	Material			Precoated sheet metal			
Dimensions	Unit	HeightxWidthxDepth		mm		902x450x164	
Weight	Unit			kg		31.2	
Power supply	Phase/Frequency/Voltage			Hz/V		-	
Electrical power consumption	Max.			W		-	
	Standby			W		-	
Operation range	Heating	Ambient	Min.~Max.	°C		-25~25	
		Water side	Min.~Max.	°C		25~55	
	Cooling	Ambient	Min.~Max.	°CDB		10~43	
		Water side	Min.~Max.	°C		5~22	
Notes					For water circuit central heating, safety valve: refer to EHYHB*		


Outdoor Unit		EVLQ		08CV3			
Dimensions	Unit	HeightxWidthxDepth		mm		735x832x307	
Weight	Unit			kg		56	
Compressor	Quantity					1	
	Type			Hermetically sealed swing compressor			
Operation range	Heating	Min.~Max.		°CWB		-25~25	
Refrigerant	Type / GWP			R-410A / 2,087.5			
	Charge			kg/TCO <sub>2</sub> Eq		1.60/3.3	
Sound power level	Heating	Nom.		dBA		62	
Sound pressure level	Heating	Nom.		dBA		49	
Power supply	Name/Phase/Frequency/Voltage			Hz/V			
Current	Recommended fuses			A		20	

(1) Condition 1: cooling T<sub>a</sub> 35°C - LWE 18°C (DT = 5°C); heating T<sub>a</sub> DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling T<sub>a</sub> 35°C - LWE 7°C (DT = 5°C); heating T<sub>a</sub> DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)  
 (3) Values according to G20 (4) 80/60 (5) 40/30 (30%)  
 Contains fluorinated greenhouse gases



Today, Daikin leads the way towards more efficient, cost-effective and environmentally friendly comfort solutions, introducing products optimised for all seasons. In fact, Daikin products reduce energy and costs in a smart way. They are designed to perform under all conditions and reflect the actual performance you can expect over an entire heating and cooling season. So, with Daikin you make the right choice for your wallet... and the environment.

**Daikin Europe N.V.** Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-729

500 · 10/14



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

The present publication supersedes ECPEN14-729. Printed on non-chlorinated paper. Prepared by La Moviada, Belgium.